

China



Energy Saving 4 Pin 48V 10.4AH 18650 Lithium Electric Bike Sliver Fish Series Anti Fall Buckle For Electric Bicycle

Basic Information

- Place of Origin:
- Certification: MSDS, UL, CE, ROHS, etc • Minimum Order Quantity: 100PCS Negotiable
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T
- Supply Ability:





Product Specification

- Cell Brand:
- Cell Material:
- Capacity:
- Maximum Continuous **Discharge Current:**
- Connection Type:

15A

13S5P

- Charging Port:
- Discharge Cut-off Voltage: 35.75V
- Highlight:

• Voltage:

48V/Customized(36V,52V) DC/Lotus Head/Canon Head/Customized Energy Saving Electric Bicycle Buckle, 4 Pin Electric Bicycle Buckle,

48V 10.4AH Electric Bicycle Buckle

Lithium Iron Phosphate Battery/Ternary/NIMH/NCM,etc

CATL/BYD/Domestic/EVE/SANYO/Sumsung/

10.4AH/Customized(20AH,30AH,40AH)



Our Product Introduction

Product Description

Energy Saving 4Pin 48V 10.4AH 18650 Lithium Electric Bike Sliver Fish Series Anti Fall Buckle For Electric Bicycle

Features:

Bluetooth APP available on request to see the status of the battery Extended operating temperature:-20°C~60°C Using Ternary Battery ,Can be Customized Other Cell Material High Energy Denisty ,Each Battery Can be Fully Charging And Discharging Short circuit/ Over current/ Over voltage/ Over temperature protection . No Fear of Wind and Rain,Waterproof and drop proof Strong metal shell, waterproof and anti-corrosion, strong and durable Built-in battery indicator light, check the power consumption anytime, anywhere Great Factory Price with Best Quality and After-Selling Service

Application: Electric Bike/Electric Scooter/Electric Two Wheels Vehicles/Electric Three Wheels Vehicles/E-Bike/E-Scooter/Electric Motorcycle Electric Folding Bike/Golf Cars/Electric Wheeled Chairs

How to buy the right electric vehicle battery:

- 1. Please confirm the voltage and capacity of the electrified equipment
- 2.Please confirm the motor power value
- 3.Battery size, optional factory fixed size or customized size


OEM/ODM service: If you want shells of different colors, different materials, different batteries, and have different requirements for application scenarios, please spare no effort to tell us, and we will provide you with more considerate services

Our Product Introduction

S	pecification
Nominal Voltage	48V
	charging:10~45°C
Working Temperature	discharge:-20~60°C
Weight	4.35KG
Cell	18650 3.6V 2600mAh-3C
Rated capacity	10.4Ah
Maximum continuous discharge current	15A (Could be customized)
Maximum Charge Current	9.5A (Could be customized)
Discharge cut-off voltage	36.4V
Cycles life	300-500 times
Specification	48V 10Ah-17Ah
Cells	65PCS 18650 or soft-pack battery
Electric Qty Display	48V/36V
Charge Connector	4PIN
Fuse Holder	6/30A
Discharge Connector	4PIN
Connection Type	13S5P
Charge cut-off voltage	54.6V
Discharge cut-off voltage	35.75V
Standard charge	Under the condition of the ambient temperature of 25 ± 2 °C, Charge the battery at constant current of 0.2C to reach 54V. Then charge the battery at constant 54.6V voltage until the charging current decreasing to 0.02C.
Standard discharge	After the standard charging , rest for 1 hour then discharge to 35.75V@0.2C.
Shipments voltage	46.3-47.3V
Maximum Charge Current	3A
Maximum continuous working current	≤20A
Rated capacity	Typical capacity:7.8Ah or customized
Trated supacity	Minimum capacity:7.5Ah-5% or customized
Operation temperature range	10~45°C
Operation temperature range	-20~60°C
Storage temperature	≤1 month: -20 ~ 45°C
	≤3 months: -10 ~ 30°C
	≤1 year: 0 ~ 30°C
Impedance	Subject to sample





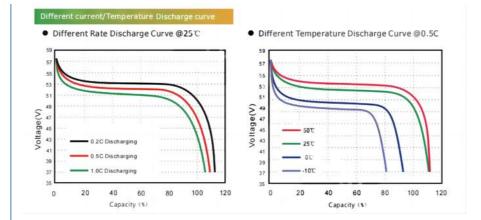





What can we offer?

1.Competitive price: factory price, we can give you more discount if order quantity is good.

2. Technical support : we have 20 person R&D team, can help you solve any technical problems and provide customized battery solutions according to your needs.

3. Quality Assurance:we have our own testing lab, all the batteries have 100% QC inspection before delivery, and we can provide testing reports for you.

4. After-sale service: we have excellent after-sale service team, if you have any question about this product, plus feel free to contact us, we'll reply you within 12 hours.

5. Customized battery solutions based on customer's needs, accept OEM/ODM orders.

Logistic Time:

- Material Preparation Time: 7-15 days (or inventory)

- Production & Assembly Time 3-10 days
- Testing & Packaging Time: 2-10 days
- Total Delivery Time: 30-45days
- The faster delivery could be negotiable.

FAQ:

Q1. Can I have a sample order? A. Yes, we welcome sample order to test and check quality.

Q2. Do you have any MOQ limit?

A.Yes, we have MOQ for mass production, it depends on the different part numbers. 1~10pcs sample order is available. Low MOQ, 1pc for sample checking is available.

Q3. How to proceed with an order?

A. Firstly let us konw your requirements or application. Secondly, we quote according to your requirements or our suggestions. Thirdly customer confirms the samples and places a deposit for formal order. Fourthly we arrange the production.

Q4. Is it OK print my logo on the product?

A. Yes. Please inform us formally before our production and confirm the design firstly based on our sample.

Q5. Which certificates do you have? A. We have CE/FCC/ROHS/UN38.3/MSDS ... etc.

Q6. How about warranty? A. 1 years warranty. Enable to prolong.		
Welocme to inquiry ,Thank you !!		
YONGSHENG Yongsheng Technology Co., Ltd.		
+86 13711839030 admin@ysxny.ltd lithiumions-battery.com		
7th Floor, Building 1, Wanfeng Technology Industry Center, Changping Town, Dongguan City, Guangdong Province, China		